




**MODEL NO. DESCRIPTION: HES51 - X X X Y Y**

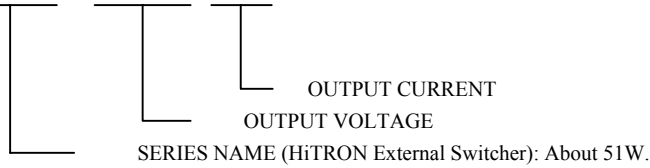

**OUTPUT VOLTAGE/CURRENT RATINGS CHART**

DEFINED OUTPUT VOLTAGE(Vdc)	OUTPUT VOLTAGE(Vdc) / CURRENT (A)
9.0Vdc ≤ Any Voltage ≤ 15.0Vdc	9.0-9.5V/5.0-4.7A, 9.6-10.0V/4.6-4.5A, 10.1-10.4V/4.4-4.3A, 10.5-11.0V/4.2A, 11.1-11.9V/4.1A, 12.0-12.5V/4.0A, 12.6-13.4V/3.9-3.7A, 13.5-14.1V/3.7-3.6A, 14.2-15.0V/3.5-3.4A.
15.0Vdc < Any Voltage ≤ 30.0Vdc	15.1-15.9V/3.3-3.2A, 16.0-17.0V/3.1A-3.0A, 17.1-18.2V/2.9-2.8A, 18.3-19.6V/2.7-2.6A, 19.7-21.2V/2.5-2.4A, 21.3-23.1V/2.3-2.2A, 23.2-24.2V/2.2-2.1A, 24.3-25.5V/2.0A, 25.6-26.8V/1.9A, 26.9-28.3V/1.8A, 28.4-30.0V/1.7A, 19.6V/3.0A.

Note: Refer to the upper Chart or specify the V/A ratings and consult factory for the exact Model No.

**SINGLE OUTPUT** (Model No. for example)

MODEL NO.	O/P VOLTAGE (Vdc)	O/P CURRENT (A)
HES51-05060	5.0V	6.0A
HES51-09050	9.0V	5.0A
HES51-12040	12.0V	4.0A
HES51-15034	15.0V	3.4A
HES51-16031	16.0V	3.1A
HES51-18028	18.0V	2.8A
HES51-19630	19.6V	3.0A
HES51-24021	24.0V	2.1A
HES51-30017	30.0V	1.7A
HES51-48010	48.0V	1.0A
HES51-58007	58.0V	0.7A

**MECHANICAL DIMENSIONS: MM [INCHES]**

**WEIGHT: 185.0g (6.53 Oz.)**

